

**Jaime McAvoy**

---

**From:** Nicole Horvitz  
**Sent:** Wednesday, November 05, 2014 9:49 AM  
**To:** jima.pc@gmail.com; jitze@couperus.org; jsmandle@hotmail.com; kavitat@comcast.net; richard.partridge@comcast.net  
**Cc:** Roger Spreen; Suzanne Avila; Jaime McAvoy  
**Subject:** Proposed Fence at 26520 Purissima Road (lands of Vahdat) Item 3.1  
**Attachments:** Decorative Metal Fence.pdf

Hello Commissioners,


Due to concerns with the proposed fence design (squared top on the wrought iron fence, details on sheet L-4 in your set of plans) for the upcoming landscape screening application, the applicant has revised the design (please see attached) to include a cross bar on the top of the fence. I will note this at the hearing and modify the conditions of approval for your review.

Sincerely,

Nicole

-----  
Nicole Horvitz  
Assistant Planner  
Town of Los Altos Hills  
26379 Fremont Road  
Los Altos Hills, CA 94022  
650-947-2504

[www.losaltoshills.ca.gov](http://www.losaltoshills.ca.gov)  
Planning Department Counter Hours  
Monday-Friday  
10 am-12 pm and 1 pm-3 pm

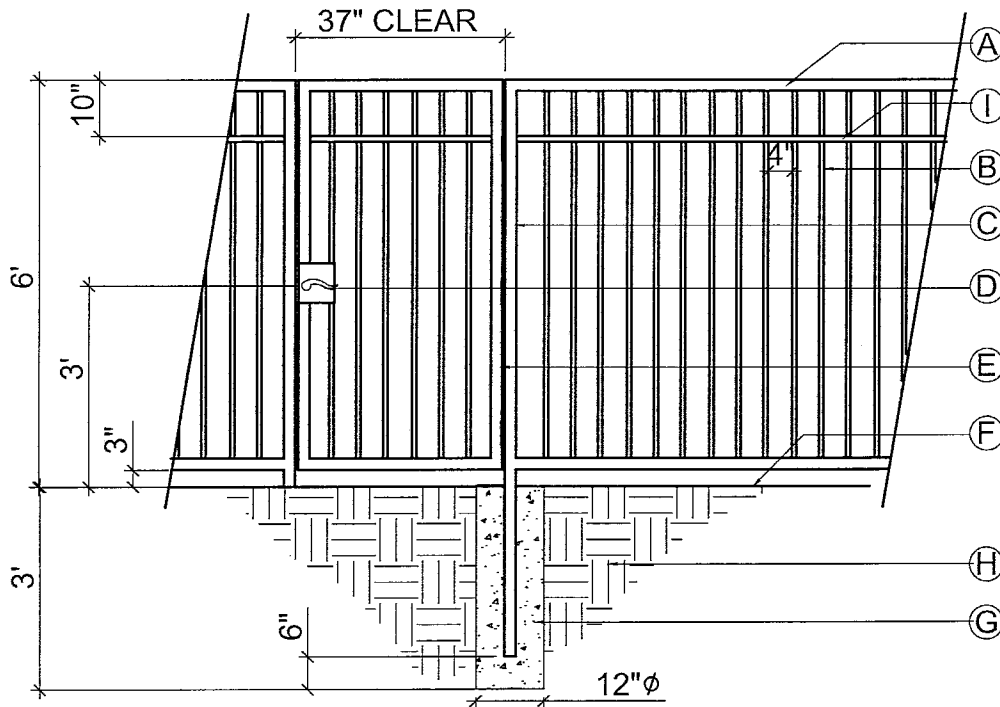

ITEM DESCRIPTIONS:

- A - 2" SQ. TUBULAR STEEL TOP AND BOTTOM RAILS; RUN PARALLEL TO GRADE.
- B - 5/8" STEEL PICKETS WELDED TO AT CENTERLINE OF TOP AND BOTTOM RAILS; PROVIDE 4" SPACING.
- C - 2" SQ. TUBULAR STEEL POSTS AT 8 FT. O.C. SPACING MAX.
- D - DECORATIVE SELF-LATCHING GATE MECHANISM; SELECTED BY OWNER.
- E - 2" SQ. TUBULAR STEEL GATE FRAME WITH (3) HEAVY-DUTY HINGES.
- F - FINISH GRADE.
- G - 12" Ø x 36" DEEP CONCRETE FOOTING AT POSTS.
- H - COMPACTED SUBGRADE.
- I - 1" SQ. STEEL TUBE MINOR RAIL

NOTES:

1. ALL METAL CONNECTIONS ARE TO BE WELDS, FREE OF PITS AND POROSITY, GROUND SMOOTH.
2. ALL EXPOSED METAL FENCE SURFACES ARE TO RECEIVE ONE COAT PRIMER PAINT, AND (2) COATS 'RUST-O-LEUM' PAINT, SATIN BLACK FINISH.

## 6 FT. DECORATIVE METAL PICKET FENCE

NO SCALE